




ENAMELLED ADJUSTABLE WIREWOUND RESISTORS MODEL SMR

TECHNICAL DESIGN

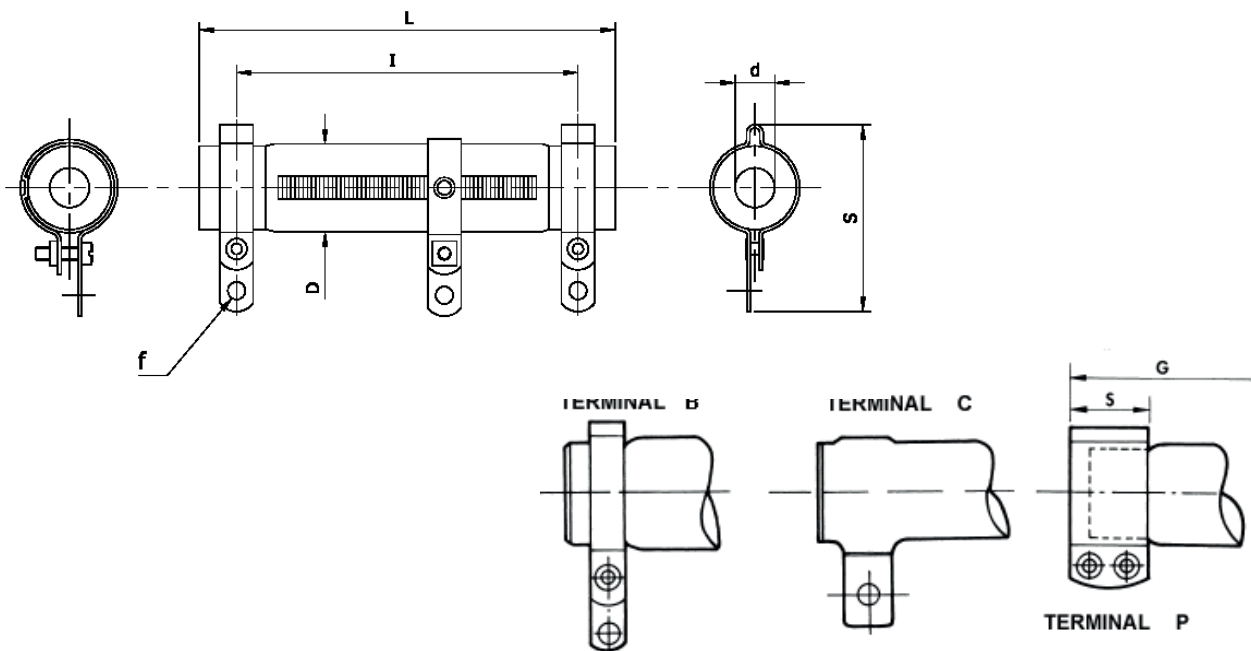

SMR TYPE	13x64	16x90	20x100	20x165	30x165	30x220	30x265
Power rating	25 W	50 W	60 W	110 W	160 W	220 W	260 W
Min. Ohmic value	10R	22R	33R	33R	39R	56R	68R
Max. Ohmic value	3K9	5K6	10K	15K	18K	22K	33K
Limits Voltage	700 V	1000 V	1200 V	1800 V	2500 V	3000 V	4000 V
DIMENSIONS	13x64	16x90	20x100	20x165	30x165	30x220	30x265
L mm	64	90	100	165	165	220	265
D mm	13	16	20	20	30	30	30
H mm	32	36	43	43	55	55	55
G mm	76	102	112	175	175	230	275
S mm	12	14	18	18	18	18	18

THE OHMIC VALUE SHOWN (MIN – MAX) ARE INTENDED AS TOTAL RESISTANCE OF WINDING

GENERAL FEATURES

Professional resistors with a regulation collar, with fine electrical and mechanical characteristics, indicated for use where high power is required, along with safe operation and durability. The external lining is protected by a layer of vitreous enamel. The resistive element consists of wire in Ni-Cr alloy or twisted constantan, on a cylindrical support in extremely pure ceramic material.

The resistors may be produced with different terminations depending on the model and ohm value, standard banner type B, with fast-on and pattern type terminals, and in versions with off-standard tolerances.

The adjustment collar enables the user to establish an intermediate value. The stability of the contact is guaranteed up to the maximum surface temperature of 350° C.

ELECTRICAL CHARACTERISTICS

- Standard tolerance: +15%
- Temperature coefficient ≤ 100 ppm/°C
- Insulation resistance > 100 Mohm (500 Vdc)
- Max operating temperature: 350 °C

MAXIMUM LOAD LIMIT

NOTE: For adjustable resistors it must be born in mind that the nominal power is understood as applied to the entire resistor, if only part of it is under tension, the power applied must be reduced in proportion to the part that is not used.

The nominal power P_n shown in the table refers to resistors placed horizontally and free in naturally circulating air, with an environmental temperature of 25° C.

With forced ventilation the nominal power dissipation capacity of the resistor increases as a function of the air speed.